

PariPoser® Interconnect 0.2mm Pitch



PariPoser® material is an anisotropic conductive elastomer. It conducts an electric current vertically through the elastomer, not horizontally.

RECOMMENDED PCB SPECIFICATIONS


Pitch of Contact Pads	0.2mm
Pad Diameter	0.12mm
Gap between Pads	0.08mm
Pad Height (combined)	0.018mm

MECHANICAL PROPERTIES


Pitch of Particle Columns	0.035mm
Contact Length	0.06mm
Typical Compression	0.02mm (30%)
Out Gassing (CVCN)	0.07%
Loading	2g/pad

ELECTRICAL CHARACTERISTICS


CRES	20mΩ
Bandwidth (S21)	>90GHz
Current Rating	1 amps per pad
Normalized Thermal Conductivity	8300W/m ² K
Breakdown Voltage	Exceeds breakdown of FR-4

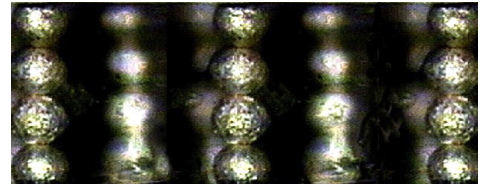

Cross section view of PariPoser® material

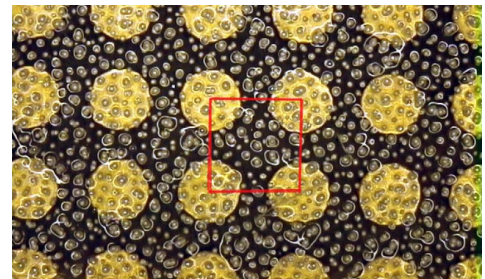

30 to 50 BallWires per pitch square

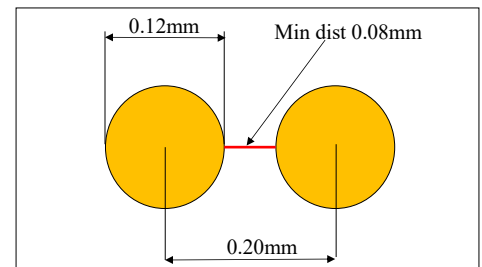

Recommended Pad Diameter/Pitch




Recommended Pad Height


Ordering options for PariPoser®

Curing	Formulation
Regular	Silver
Space	Gold
Non-Stick	Thermal Silver
Special	Thermal Gold

Insertion Loss

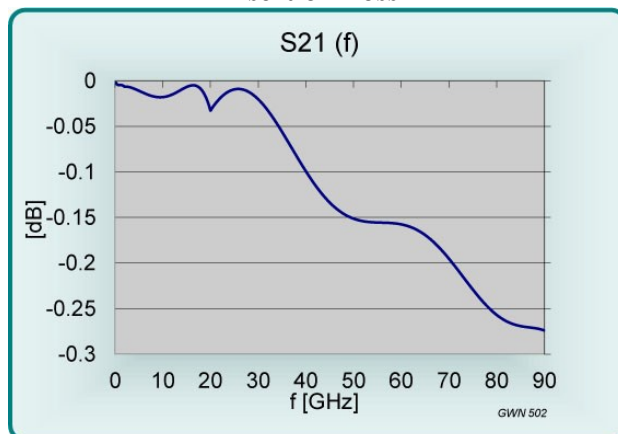

Return Loss

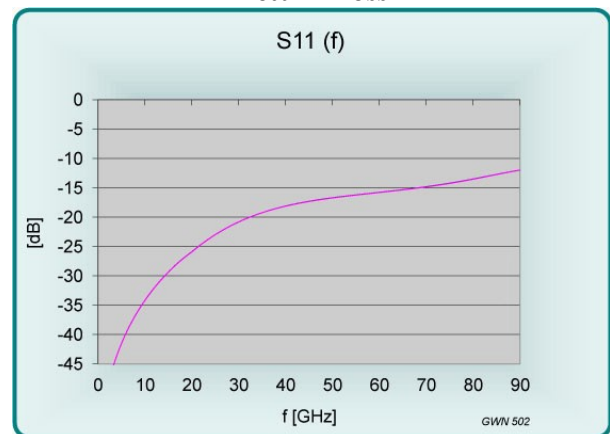

S-Parameters available upon request

PARIPOSER