

PariPoser® Interconnect 0.8mm Pitch



PariPoser® material is an anisotropic conductive elastomer. It conducts an electric current vertically through the elastomer, not horizontally.

RECOMMENDED PCB SPECIFICATIONS


Pitch of Pads	0.8mm
Pad Diameter	0.48mm
Gap between Pads	0.32mm
Pad Height (combined)	0.053mm

MECHANICAL PROPERTIES


Contact Length	0.22mm
Typical Compression	0.07mm (30%)
Out Gassing (CVCM)	0.07%
Loading	32g/pad

ELECTRICAL CHARACTERISTICS


CRES	20mΩ
Bandwidth (S21)	>90GHz
Current Rating	15 amps per pad
Normalized Thermal Conductivity	2200W/m ² K
Breakdown Voltage	Exceeds breakdown of FR-4

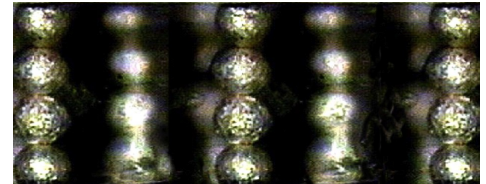

Cross section view of PariPoser® material

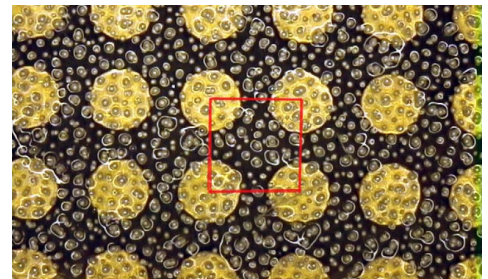

30 to 50 BallWires per pitch square

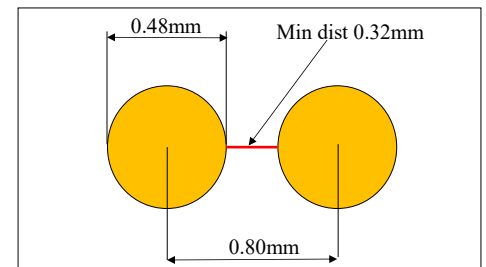

Recommended Pad Diameter/Pitch



Recommended Pad Height

Ordering options for PariPoser®

Curing	Formulation
Regular	Silver
Space	Gold
Non-Stick	Thermal Silver
Special	Thermal Gold

Insertion Loss

Graph Data currently unavailable

Return Loss

Graph Data currently unavailable

S-Parameters available upon request

PARIPOSER